


PRODUCT NAME: Anastasia 22-LT LED Pendant
ITEM NUMBER: E20748

Please consult your electrician for hanging fixture and wiring.

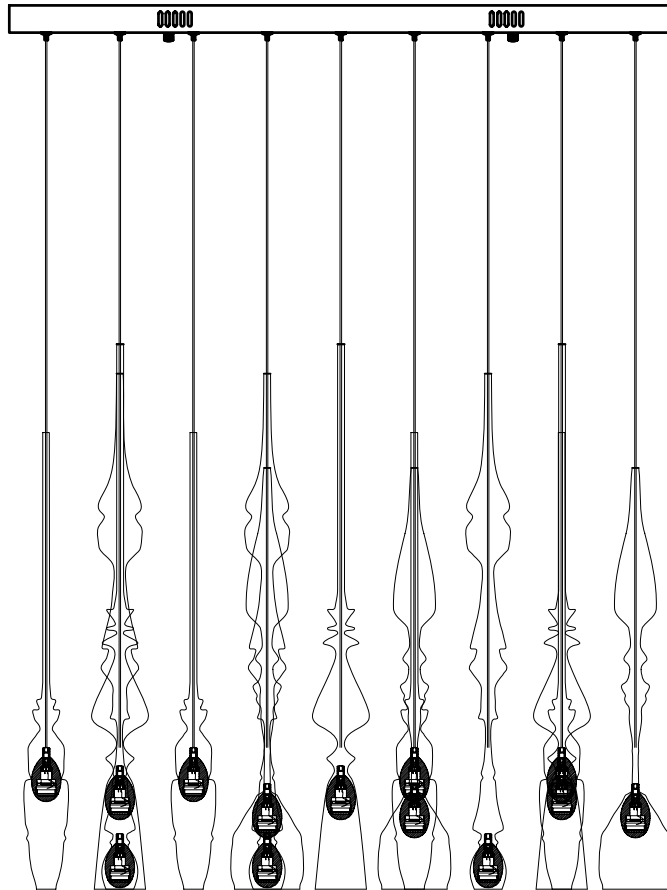

WARNING: Wires need to be connected to driver found in canopy and should not be connected directly to power source or a short may occur.

The fixture is designed to dim with a standard Triac forward phase dimmer.

Dimming levels will vary by dimmer.

Below is a list of recommended dimmers:

Lutron MACL-153M

Lutron DVL-153P

Lutron SCL-153P

Leviton IPL06-10Z

Leviton 6674-POW


Due to inrush current wattage should not exceed 150 watts of product for a 600 watt dimmer.

Bulbs (included): LED 66W

IMPORTANT: Turn off the power at the main fuse or circuit breaker box before starting installation



Screws*4PCS


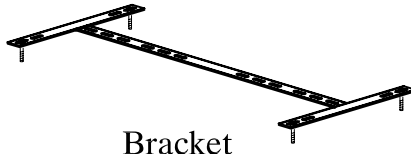


Bracket




Mounting Screws*4PCS


Locate all hardware & components before discarding packaging

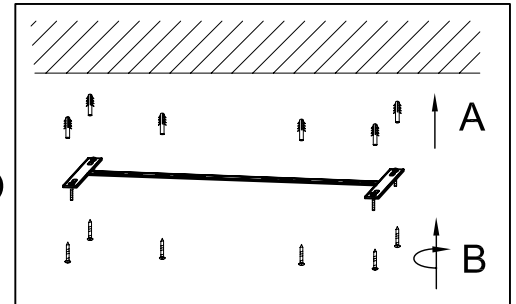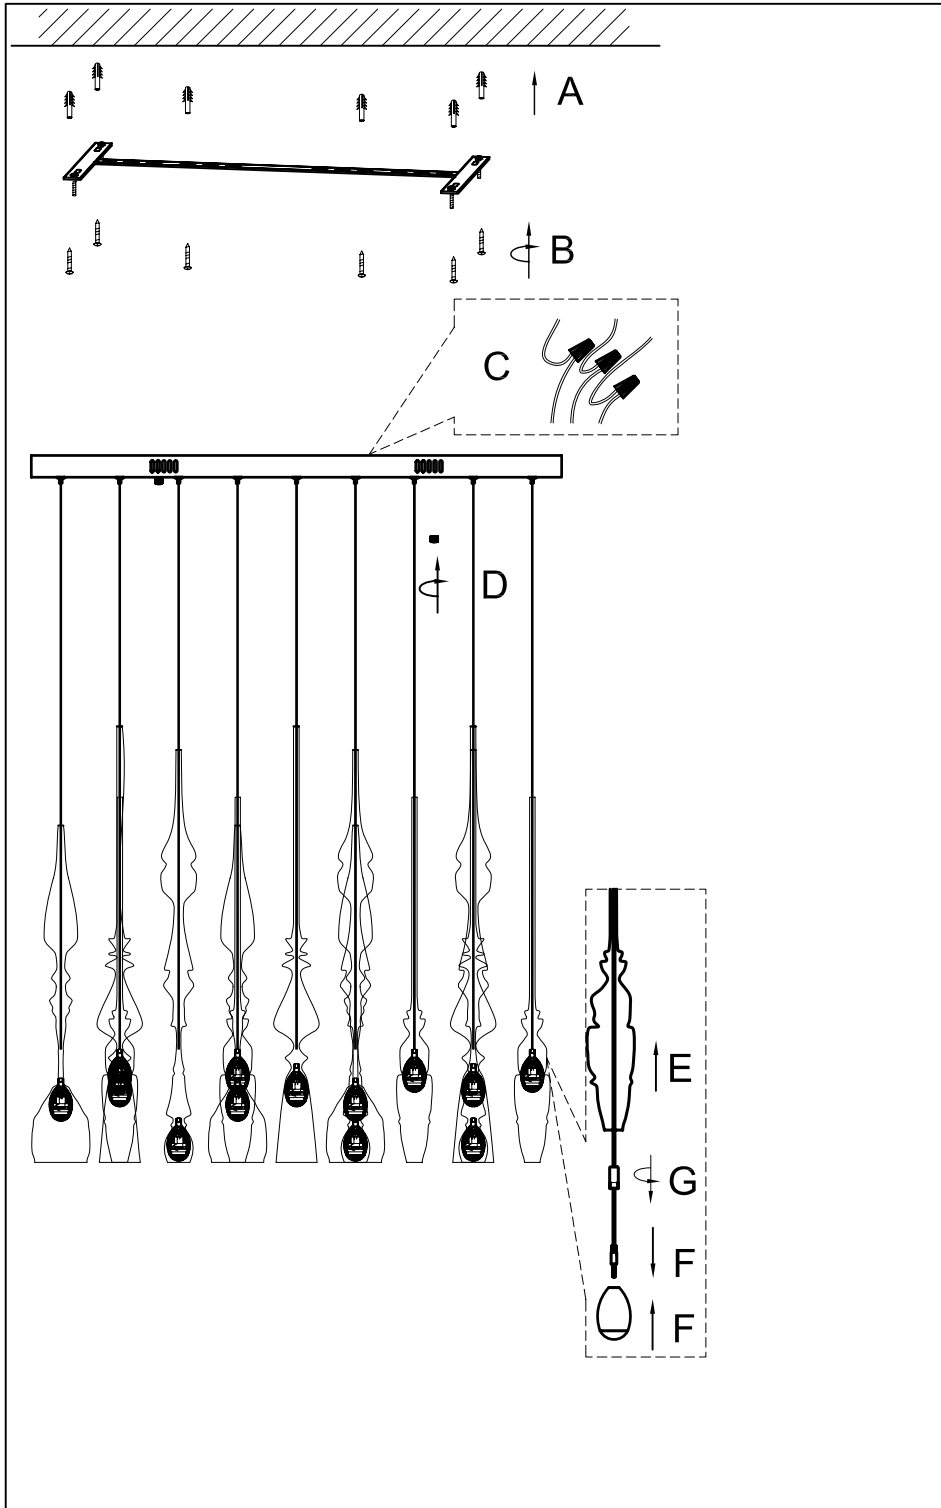

1.) Step 1: Remove mounting bracket from fixture and install to electrical box.

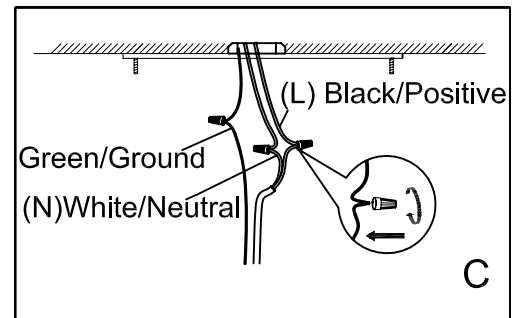

2.) Step 2: Then wire fixture to wires in outlet box. Copper wire is for Ground. install lamp body to mounting bracket using two screws on side.

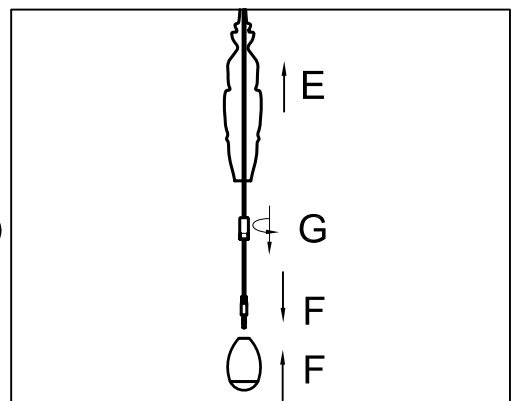


3.) Run glass (E) over wire. Plug in light engine (F) and thread part (G) to secure. Carefully lower glass over light engine (F).


Cleaning & Care:

You may use talcum powder and a soft cloth for cleaning. Do not use abrasive cleaner.

Pendant Wires

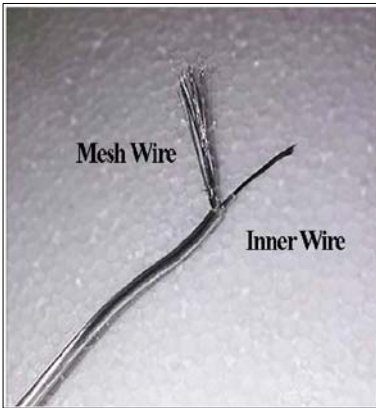

Driver Wires

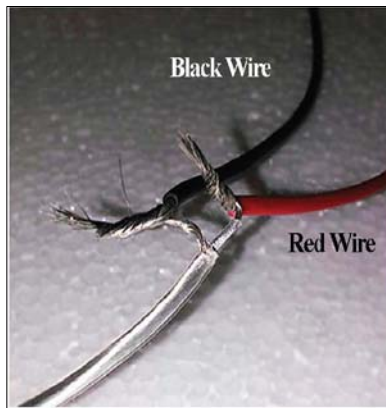

Pendant	Driver
InnerWire (+)	Driver Red (+)
Outer Mesh (-)	Driver Black (-)

If wires are cut in the process of adjusting the height, please note the pendants consist of an outer mesh wire(ground) and inner(live) wire that must be separated before re-joining with the driver output wires. Pendant are wired in series to the drivers, as shown below

LED-D48V-300 LED-D48V-300 LED-D48V-300 LED-D48V-300 LED-D48V-300

