


PRODUCT NAME: Moonbeam ITEM NUMBER: E22440-11MS

Please consult your electrician for hanging fixture and wiring.

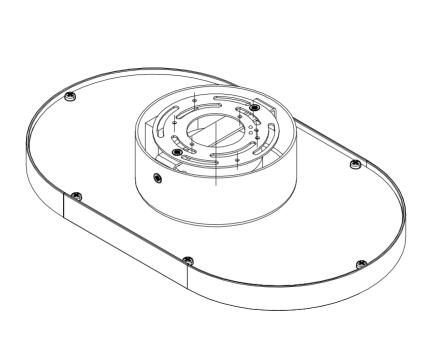

WARNING: WIRES NEED TO BE CONNECTED TO DRIVER FOUND IN CANOPY AND SHOULD NOT CONECT DIRECTLY TO POWER SOURCE OR A SHORT MIGHT OCCUR.

The fixture is designed to dim with a standard Triac forward phase dimmer. Dimming levels will vary by dimmer.

Below is a list of recommended dimmers:

Lutron MACL-153M Lutron DVL-153P Lutron SCL-153P Leviton IPL06-10Z Leviton 6674-POW


Due to the inrush current wattage should not exceed 150 watts of product for a 600 watt dimmer.

25W LED

IMPORTANT: Turn off the power at the main fuse or circuit breaker box before starting installation





Bracket (A)




Body (B)

Locate all hardware & components before discarding packaging

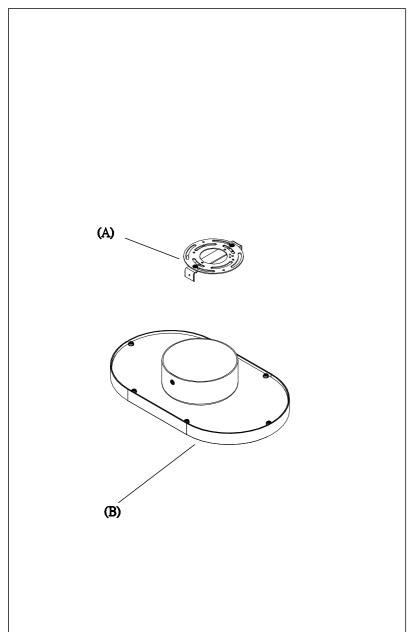




Step.1: Remove Bracket (A) from fixture and install to electrical box.



Step.2: Wire fixture to wires in outlet box. Install Green wire to Ground Screw.



Step.3: Install Body (B) to Canopy (A) and tighten screws at the ends of the canopy to secure.

Cleaning & Care:

Clean with soft cloth and a mild detergent. Do not use abrasive cleaner.