

Diagram A

Turn off power at breaker for outlet fixtures is being installed to.

1. Electrical Wiring:

WARNING: The fixture wires need to be connected to DRIVER found in the backplate. Do not connect the Red and Black wire from fixture directly to power source or a Blowout/Shortcircuit might occur.

Connect the WHITE wire of the Driver to the White/Neutral wire from electrical source using the wire nut provided. Connect the BLACK wire of the Driver to the Black/Life wire from electrical source using the wire nut provided. Connect the GROUND wire from the fixture and Ground of the electrical source to the Green Ground screws on the backplate.

WARNING: Please refer to the Electrical wiring instructions provided for safety and proper procedure of electrical wiring. Consult a qualify electrician for electrical wiring if you are not familiar with electrical wiring.

2. Assembling Instructions

1. Install Crossbar Assembly to outlet box using Machine screw
2. Assemble the fixture per Diagram B.
3. Adjust wire length of each light to your desire height
4. Wire fixture assembly per Diagram A
5. Install fixture assembly to Crossbar assembly and secure with finials per Diagram B

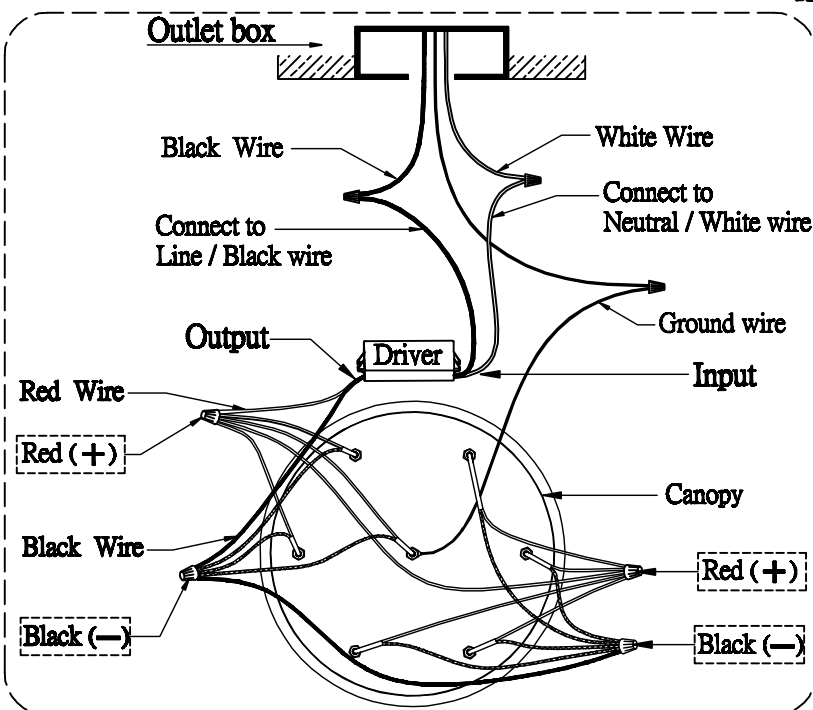


Diagram B

