


**Diagram A**

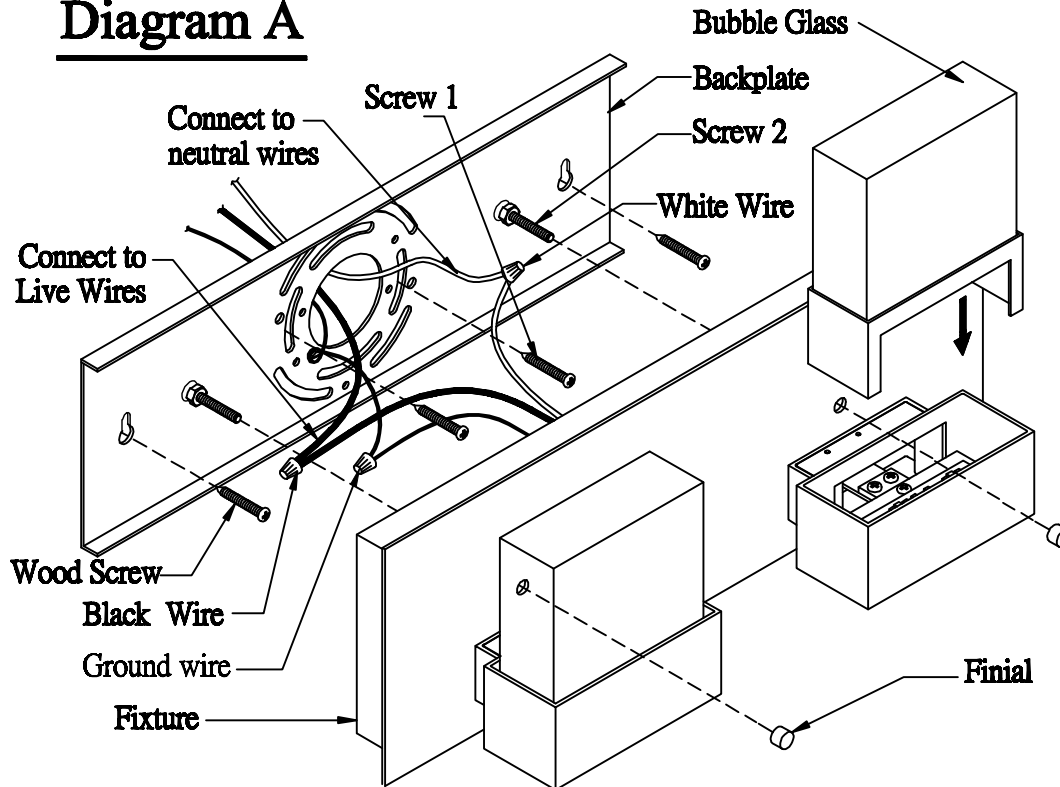

**1. Electrical Wiring:**

**WARNING:** The Fixture wires need to be connected to DRIVER found in the backplate. Do not connect the Red and Black wire from fixture directly to power source or a Blowout/Shortcircuit might occur.

Connect the WHITE wire of the Driver to the White/Neutral wire from electrical source using the wire nut provided. Connect the BLACK wire of the Driver to the Black/Live wire from electrical source using the wire nut provided. Connect the GROUND wire from fixture and Ground of the electrical source to the Green Ground screws on the backplate.

**WARNING:** Please refer to the Electrical wiring instructions provided for safety and proper procedure of electrical wiring. Consult a qualify electrician if you are not familiar with electrical wiring.

**2. Assembling Instruction:**

- Position the backplate on the wall at desired location and mark the place for the anchor at the 2 key hole location of the backplate.
- Drill pilot holes on the marked spots and insert plastic anchors.
- Attach the Backplate to the outlet box using the screws #1 provided. Use the wood screws to further secure the backplate to wall at the 2 plastic anchor place.
- Do electrical wiring. Please refer to Section 1 for electrical wiring. Also refer to the Electrical wiring instruction provided for safety procedure before doing electrical installation. Please refer to Diagram B for details.
- Attach fixture to the backplate with the screw #2 passing through the hole on the fixture. Secure with Finial provided. Please refer to Diagram A for details.

**Diagram B**

