



Diagram A


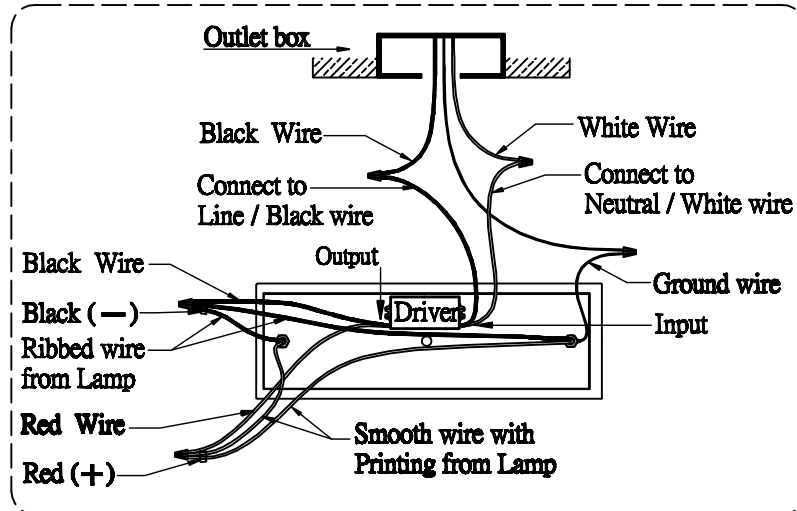


Diagram B

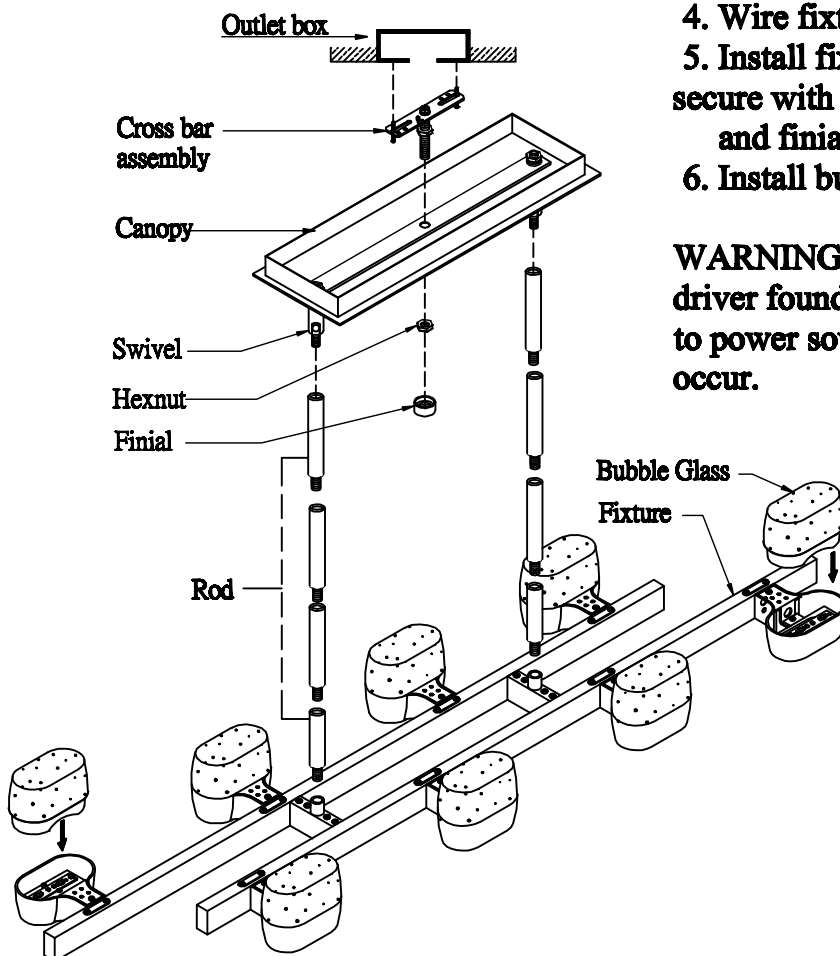

Turn off power at breaker for outlet fixtures is being installed to.

1. Install Crossbar Assembly to outlet box using Machine screw
2. Assemble the fixture per Diagram B.
3. Add 6" and 12" rod to the fixture to your desire height
4. Wire fixture assembly per Diagram A
5. Install fixture assembly to Crossbar assembly and secure with Hex Nut and finial per Diagram B
6. Install bubble glass into glass holder

WARNING: These wires need to be connected to driver found in the canopy. Do not connect directly to power source or a Blowout/Shortcircuit might occur.