
# Contemporary Lighting

PRODUCT NAME: Satellite ITEM NUMBER: E24284-24

Please consult your electrician for hanging fixture and wiring.

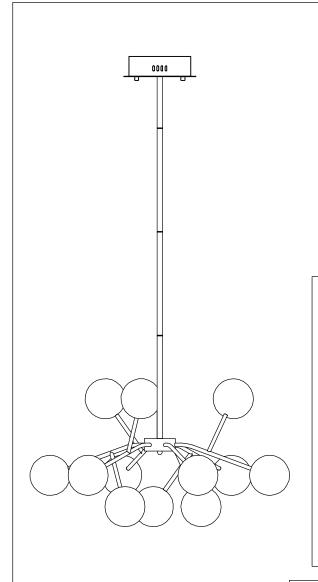

The fixture is designed to dim with a standard Triac forward phase dimmer. Dimming levels will vary by dimmer.

Below is a list of recommended dimmers:

Lutron MACL-153M

Lutron DVL-153P


Lutron SCL-153P

Leviton IPL06-10Z


Leviton 6674-POW


Due to inrush current wattage should not exceed 150 watts of product for a 600 watt dimmer.

Warning! Wires need to be connected to driver found in canopy and should not be connected directly to power source or a short may occur.




#### Locate all hardware & components before discarding packaging

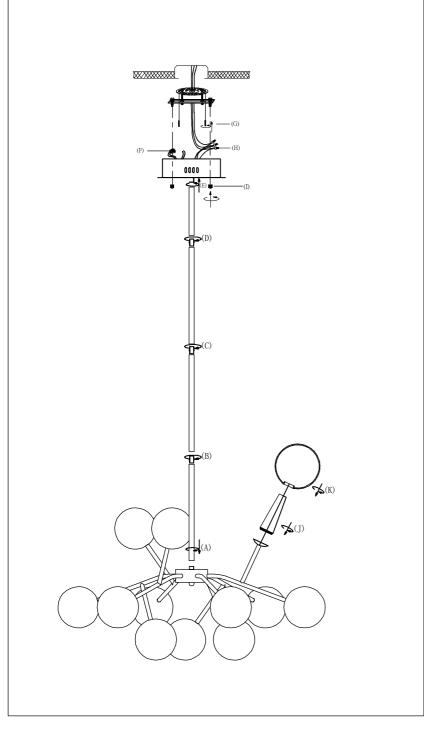




Step.1: Run wire through stems and combine stem lengths to meet desired mounting height.



Step.2: Using wire terminal block in the canopy, wire the low voltage red/black wire to the driver accordingly Connect red wire to red, black wire to black.




Step.3: Remove mounting bracket (G) from fixture and install to electrical box.


## Cleaning & Care:

Clean with soft cloth and a mild detergent. Do not use abrasive cleaner.




#### Locate all hardware & components before discarding packaging

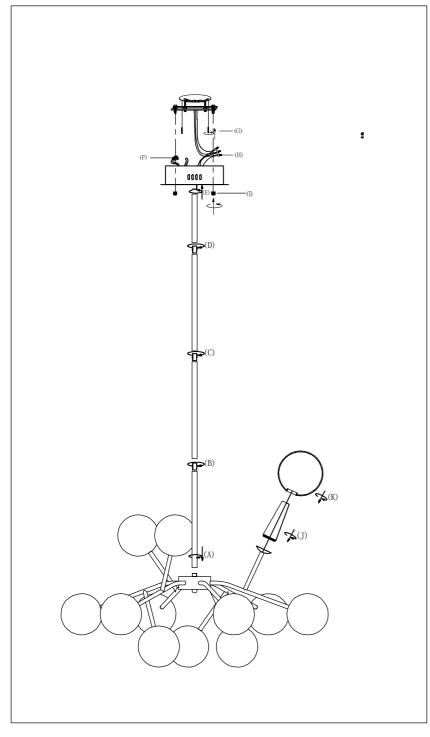




Step.4: Wire fixture to wires in outlet box.

Green wire is for Ground. Install fixture to bracket and tighten screws at the ends of the canopy to secure.



Step.5: Install fixture to bracket and tighten ball nuts (I) on the canopy to secure.



Step.6: Thread acrylic diffuser (J) to the candle base. Then thread glass (K) over diffuser

### Cleaning & Care:

Clean with soft cloth and a mild detergent. Do not use abrasive cleaner.

ITEM NUMBER: E24284-24 Acrylic Diffuser & Glass 0000 K:12PCS EGLS24284-24 J:12pcs EACL24284-09 MADE IN CHINA Page 4 of (4)