


Contemporary Lighting™

PRODUCT NAME: Sven 1LT Pendant
ITEM NUMBER: E24608

Please consult your electrician for hanging fixture and wiring.

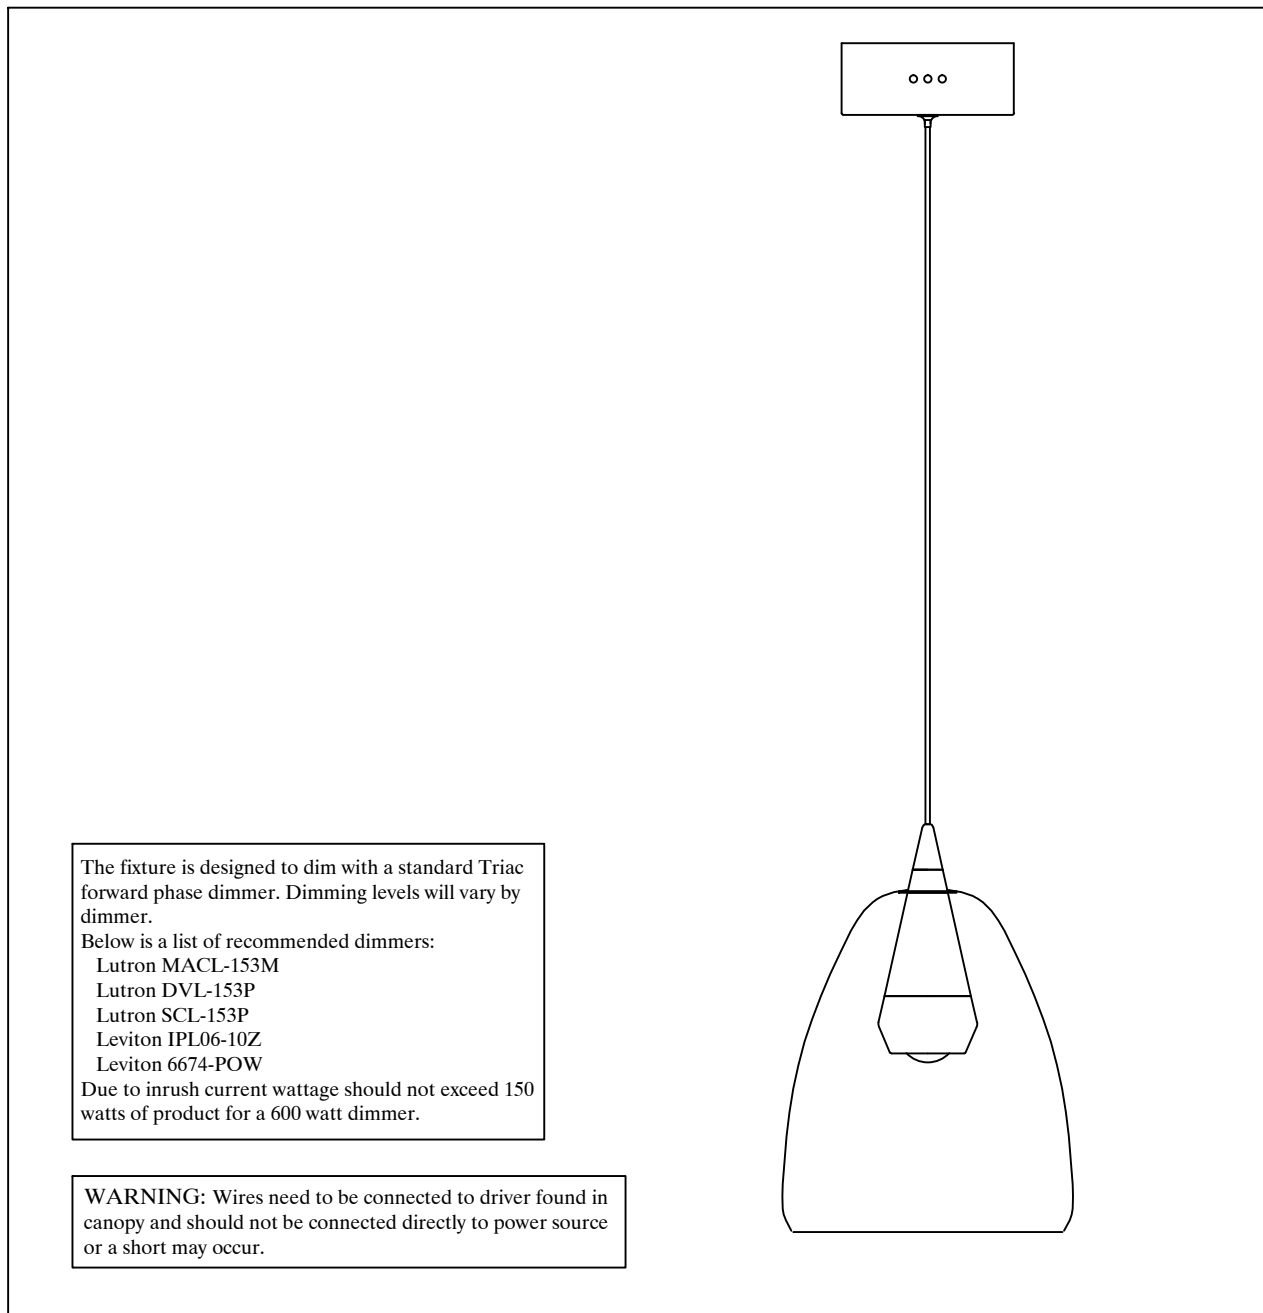

The fixture is designed to dim with a standard Triac forward phase dimmer. Dimming levels will vary by dimmer.
Below is a list of recommended dimmers:
Lutron MACL-153M
Lutron DVL-153P
Lutron SCL-153P
Leviton IPL06-10Z
Leviton 6674-POW
Due to inrush current wattage should not exceed 150 watts of product for a 600 watt dimmer.

WARNING: Wires need to be connected to driver found in canopy and should not be connected directly to power source or a short may occur.

Bulb (Included):1*LED*5W

IMPORTANT: Turn off the power at the main fuse or circuit breaker box before starting installation




Bracket (A)



Screws(B)





Mounting Screws(C)




Canopy(E)

Locate all hardware & components before discarding packaging

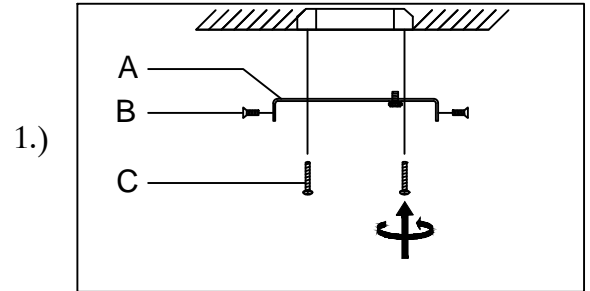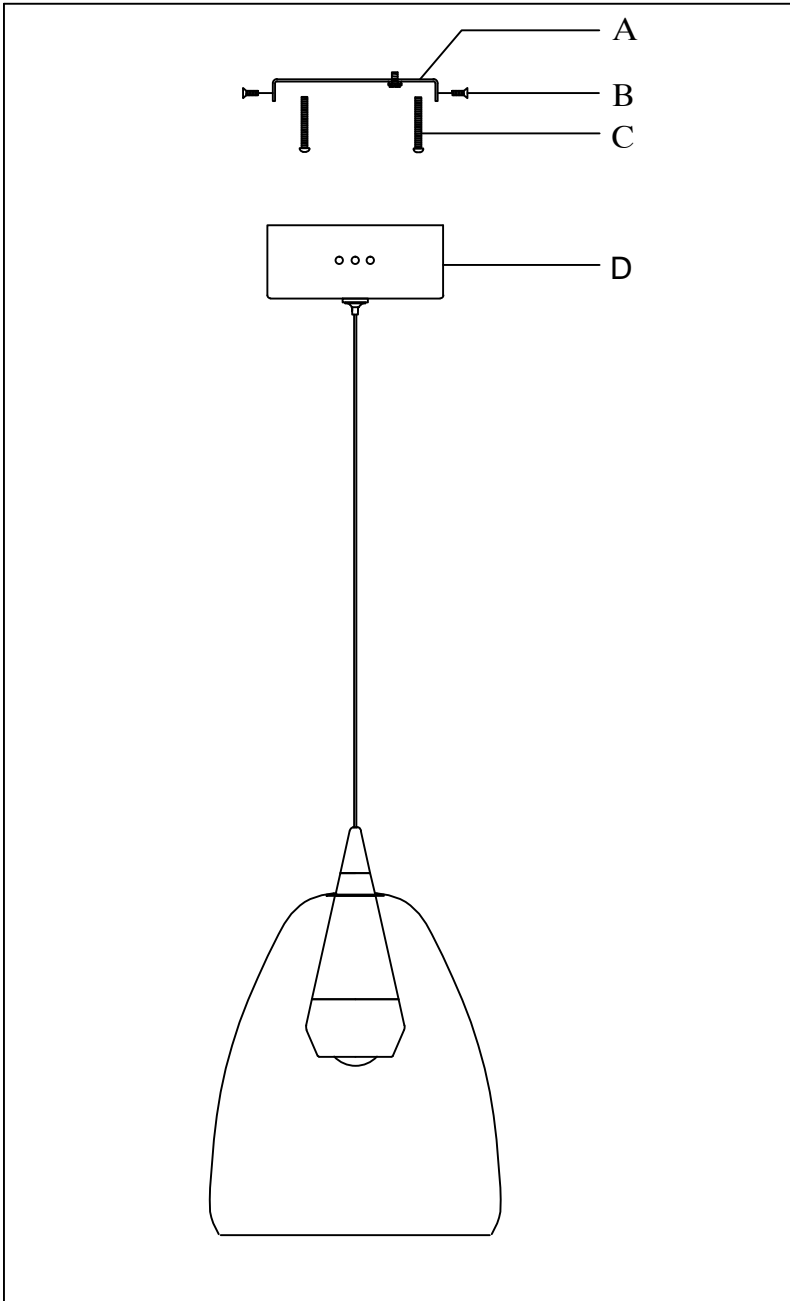


1.)

Step1 :Remove mounting bracket from fixture and install to electrical box.

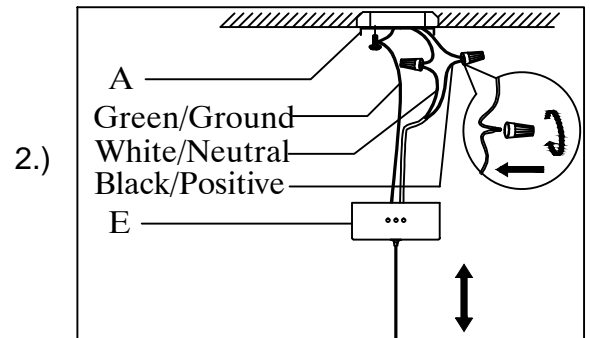

2.)

Step2 :Adjust wire length to desired mounting height, and tighten strain relief screws to secure. Wire fixture to wires in outlet box. Green wire is for Ground.

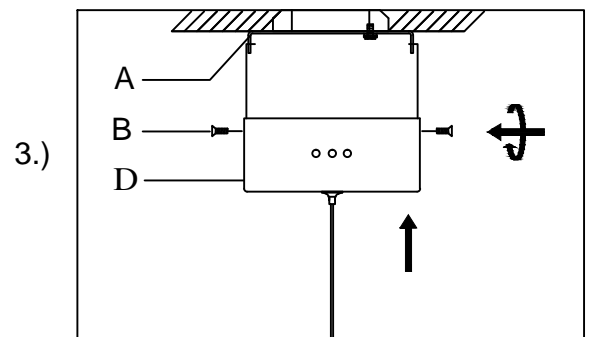

3.)


Step3 :Install fixture to bracket by securing screws on the edge of the back plate (D) to bracket (A).

Cleaning & Care:


Clean with soft cloth and a mild detergent.

Do not use abrasive cleaner.

Pendant Wires

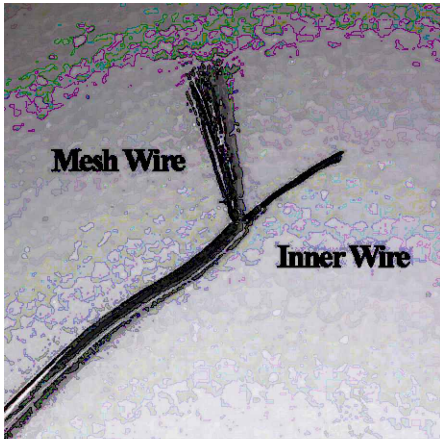


Driver Wires

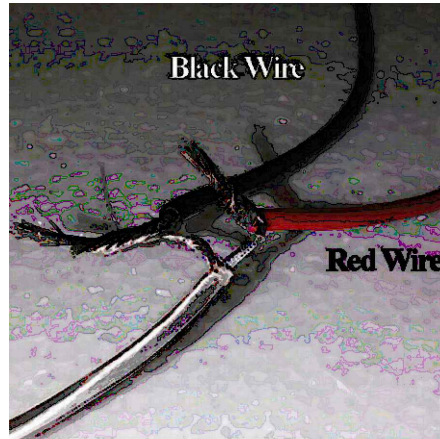

Pendant	Driver
InnerWire (+)	Driver Red (+)
Outer Mesh (-)	Driver Black(-)

Step 4. If wires are cut in the process of adjusting the height, please note the pendants consist of an outer mesh wire(ground) and inner (live) wire that must be separated before re-joining with the driver output wires. Pendants are wired in Parallel connection series to the driver, as shown below

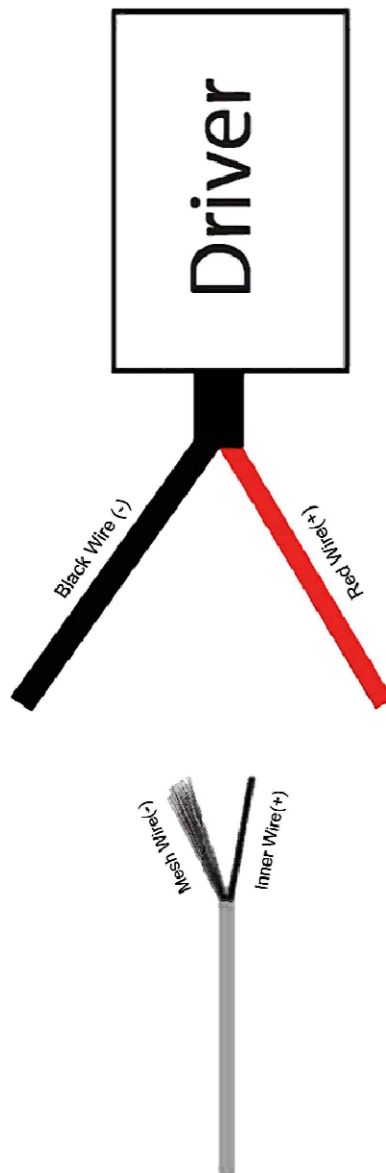


IMPORTANT: Turn off the power at the main fuse or circuit breaker box before starting installation



Plug (F)





Elevator (G)




Glass lampshade (H)


Glass lampshade replacement - take down

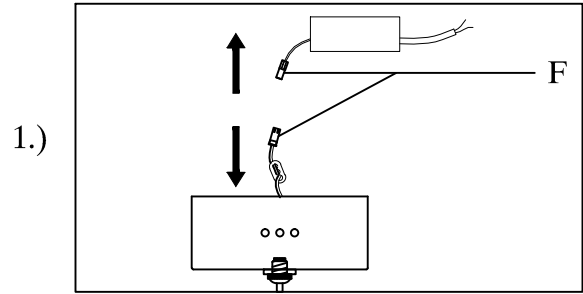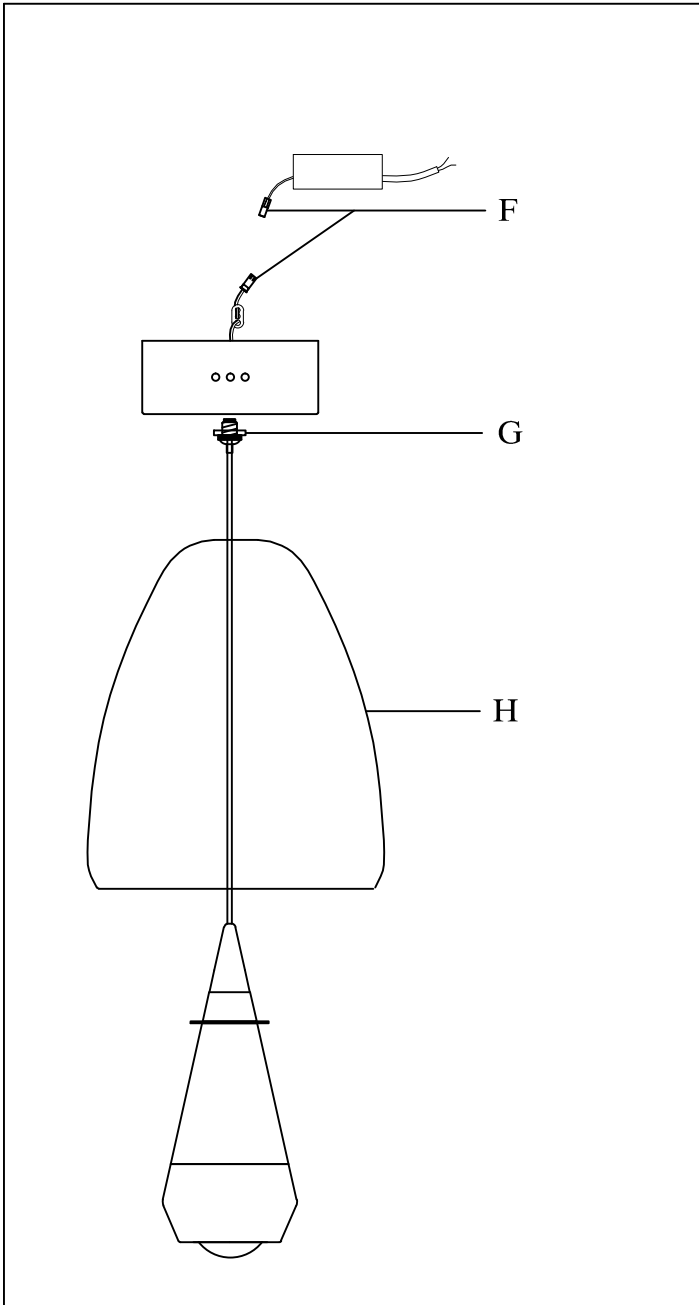

Step1 :Remove plug.

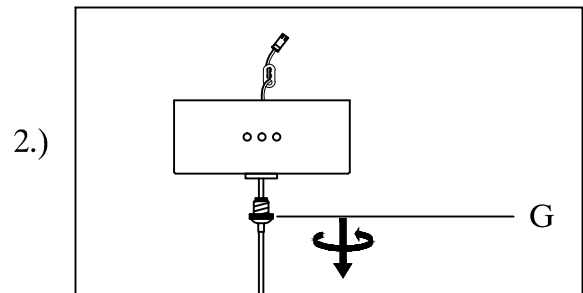

Step2 :Unscrew the elevator.

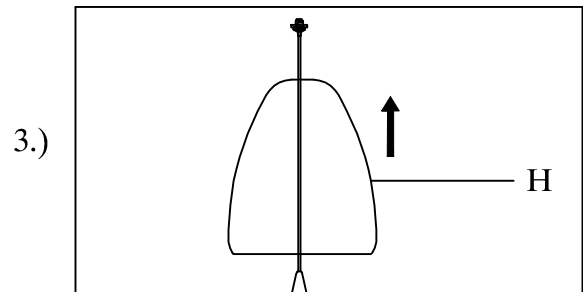

Step3 : Remove the glass lampshade.

Cleaning & Care:
Clean with soft cloth and a mild detergent.
Do not use abrasive cleaner.


IMPORTANT: Turn off the power at the main fuse or circuit breaker box before starting installation



Plug (F)




Elevator (G)




Glass lampshade (H)

Glass lampshade replacement - installation

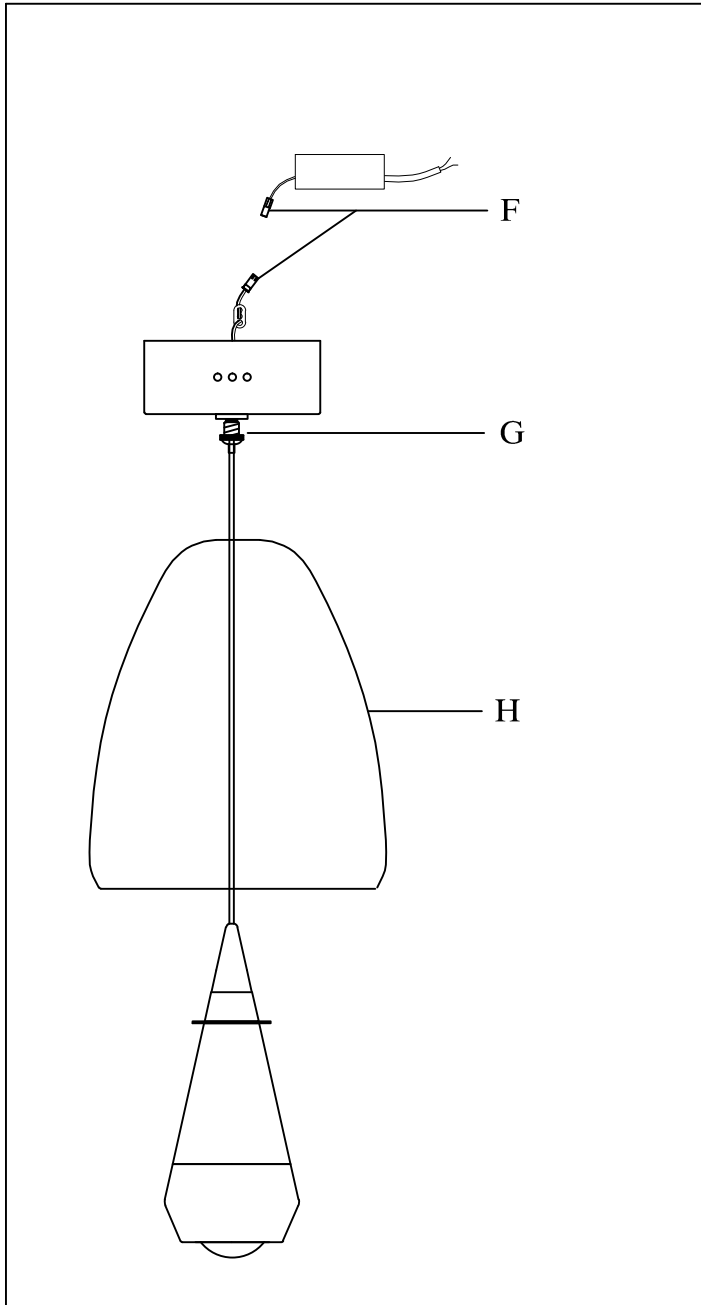


1.)

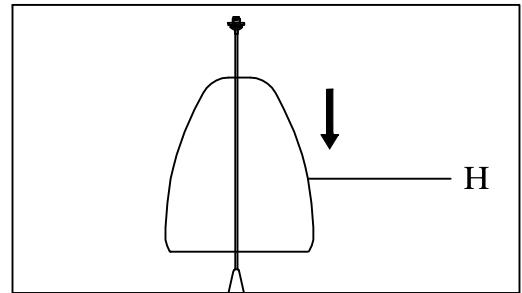


Step1 : Install the glass lampshade.

2.)

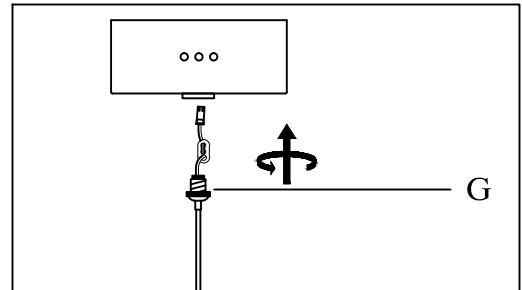

Step2 :Tighten the elevator.

3.)

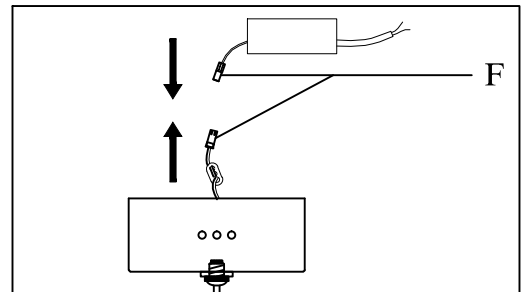

Step3 :Plug in.

Cleaning & Care:
Clean with soft cloth and a mild detergent.
Do not use abrasive cleaner.