




Contemporary Lighting

PRODUCT NAME: Tilt
ITEM NUMBER: E30621

Please consult your electrician for hanging fixture and wiring.

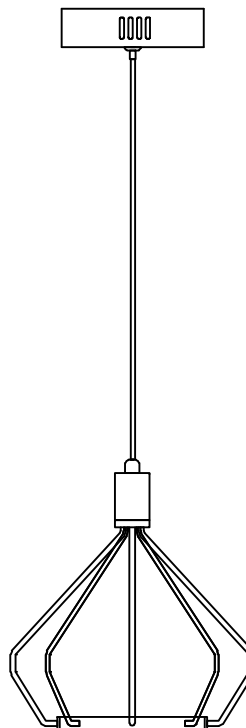

The fixture is designed to dim with a standard Triac forward phase dimmer. Dimming levels will vary by dimmer.

Below is a list of recommended dimmers:

**Lutron MACL-153M
Lutron DVL-153P
Lutron SCL-153P
Leviton IPL06-10Z
Leviton 6674-POW**

Due to the inrush current wattage should not exceed 150 watts of product for a 600 watt dimmer.

WARNING: Wires need to be connected to driver found in canopy and should not be connected directly to power source or a short may occur

LED 1x6W Bulb

MADE IN CHINA
Page 1 of (2)

IMPORTANT: Turn OFF the power at the main fuse or circuit breaker box before starting installation



A
Mounting Hardware




B
Back Plate




C
Back Plate Screws


Locate all hardware & components before discarding packaging

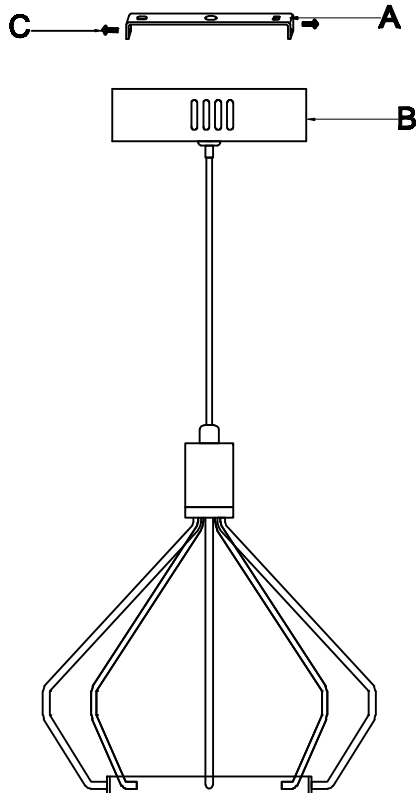

1.)

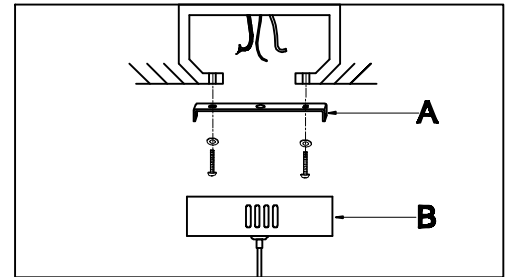

Step.1: Remove mounting bracket (A) from back plate (B) and install to electrical box.

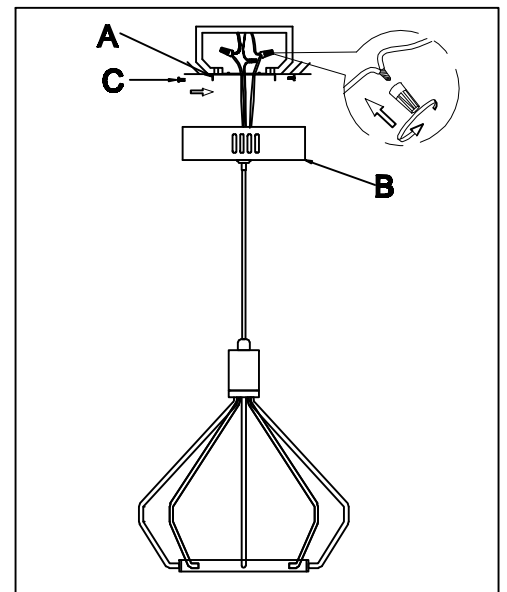

Step.2: Adjust wire length to desired mounting height. Wire fixture to wires in outlet box. Copper wire is for Ground. Attach fixture (B) to mounting hardware (A) using screws (C) to secure.

Cleaning & Care:

**Clean with soft cloth and a mild detergent.
Do not use abrasive cleaner.**