


Contemporary Lighting

PRODUCT NAME: Light Saber

ITEM NUMBER: E41430-75GM

Please consult your electrician for hanging fixture and wiring.

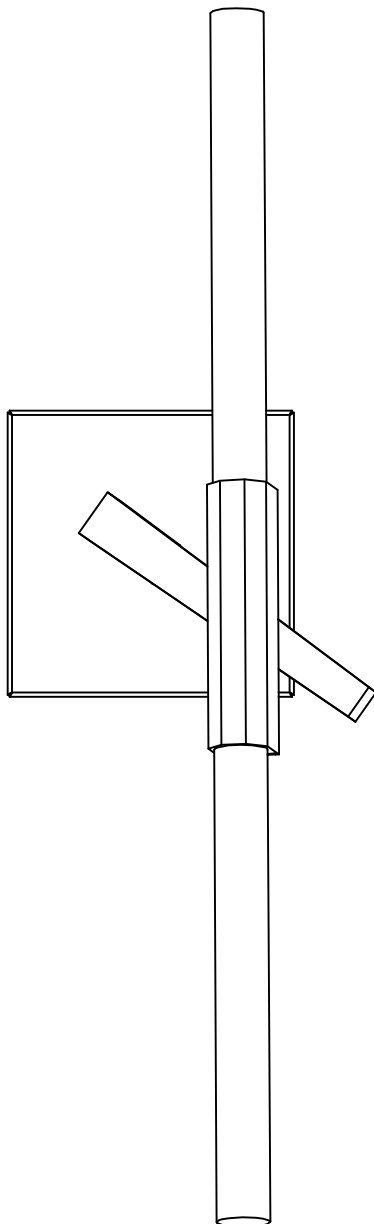

WARNING: Wires need to be connected to driver found in canopy and should not be connected directly to power source or a short may occur.


The fixture is designed to dim with a standard Triac forward phase dimmer. Dimming levels will vary by dimmer.
Below is a list of recommended dimmers:

Lutron MACL-153M
Lutron DVL-153P
Lutron SCL-153P
Leviton IPL06-10Z
Leviton 6674-POW



Due to the inrush current wattage should not exceed 150 watts of product for a 600 watt dimmer.

2 x 3W LED (integrated)


IMPORTANT: Turn OFF the power at the main fuse or circuit breaker box before starting installation

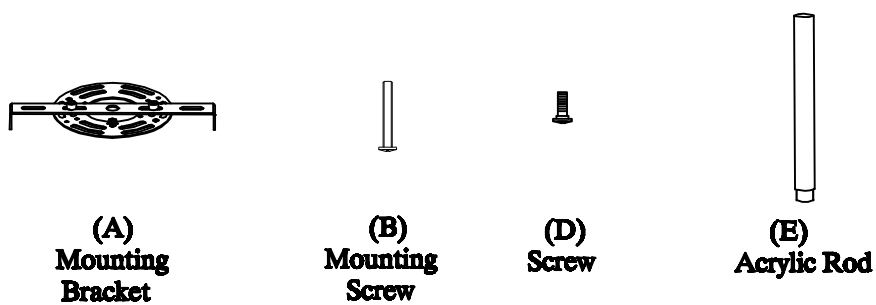

Locate all hardware & components before discarding packaging

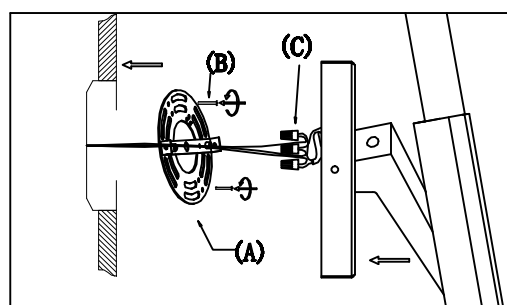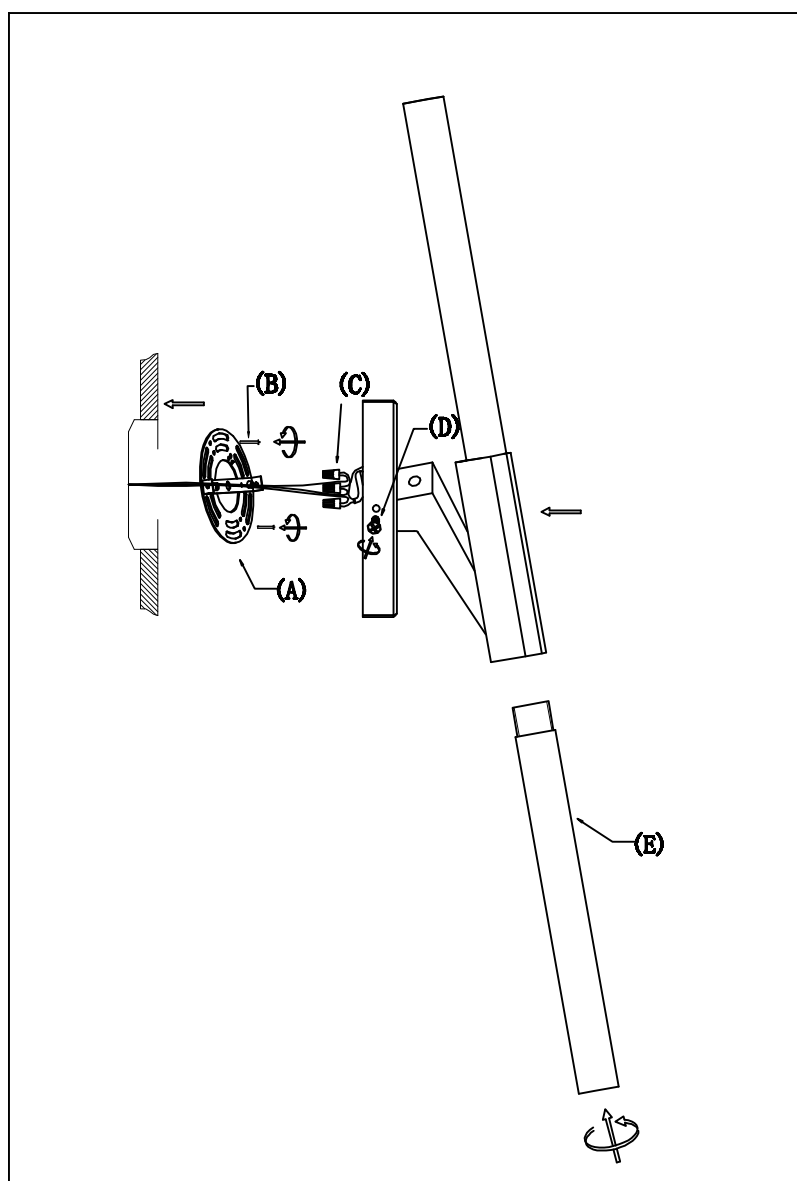

Step 1: Remove mounting bracket (A) from fixture and install to electrical box. Then wire fixture (C) to wires in outlet box. Copper wire is for Ground.

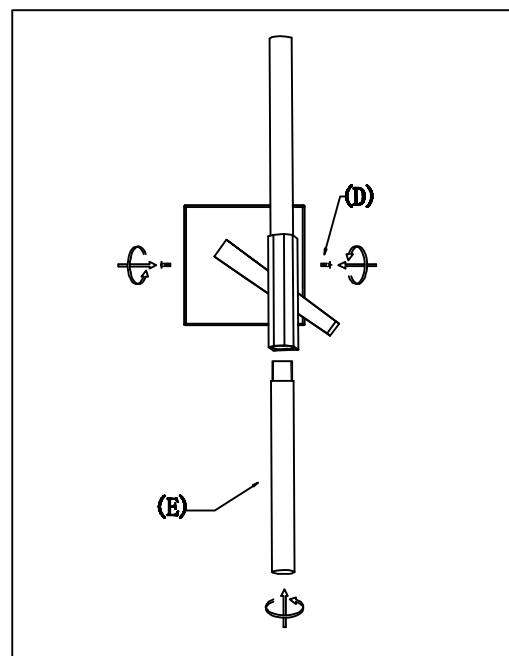

Step 2: Install lamp body to back plate using two screws (D) on the sides. Thread acrylic rod (E) to fixture.

Cleaning & Care:

**Clean with soft cloth and a mild detergent.
Do not use abrasive cleaner.**