

# ALUMILUX™ PATH LED I PATHWAY

## E41363


- ETL, cETL IP65
- LED 3000K, CRI 90+
- Wet Location
- Use with a Low-Voltage Landscape Transformer (Not Included)



Job Name : \_\_\_\_\_  
Job Type : \_\_\_\_\_  
Quantity : \_\_\_\_\_  
Comments : \_\_\_\_\_

### PRODUCT DESCRIPTION

Provide safe and functional lighting along your paths by adding spot lighting and bollards. These machined aluminum products enhance the architectural elements of your home by using techniques like grazing and uplighting. Whether you choose to accentuate an object of interest or extend your living space, this collection has the sleek and slim profile to blend seamlessly into your pathways.

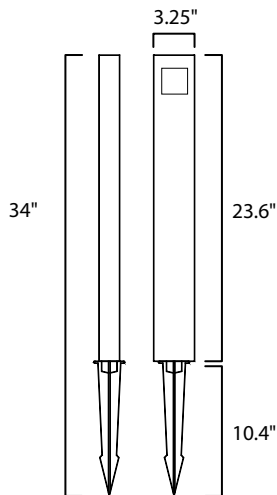

### MEASUREMENT


DIMENSIONS : 3.25"W x 34"H  
WIRE LENGTH : 36"  
HANGING WEIGHT : 4 Lb

### LAMPING

INPUT VOLTAGE : 12V  
LUMENS : 140 Rated  
BULB : (2) 2W PCB LED (Integrated)  
DIMMABLE : No  
CRI : 80+  
COLOR TEMPERATURE: 3000K

### FINISHES OPTIONS:

Satin Aluminium (SA)  
Bronze (BZ)



### MATERIAL:

Aluminium

### RATINGS:

ETL cETL IP65  
Wet Location  
Title 24 (For Outdoor)



### ADDITIONAL:

RATED LIFE: 35,000 Hours  
OPERATING TEMP: -20° C (-4°), 40°C (104°F)  
PHOTOMETRIC: Report Found Online  
PCB LED Integrated

*Always consult a qualified electrician before installing any lighting product*



Contemporary  
Lighting™

### WESTERN DISTRIBUTION CENTER (HEADQUARTERS)

253 NORTH VINELAND AVE | CITY OF INDUSTRY, CA 91746

### EASTERN DISTRIBUTION CENTER

4200 SHIRLEY DR. | ATLANTA, GA 30336

P. 626.956.4200 | F. 626.956.4225 | et2online.com