

ALUMILUX™ PATH LED I PATHWAY

E41366

- ETL, cETL IP65
- LED 3000K, CRI 90+
- Wet Location
- Use with a Low-Voltage Landscape Transformer (Not Included)



Job Name : _____
 Job Type : _____
 Quantity : _____
 Comments : _____

PRODUCT DESCRIPTION

Provide safe and functional lighting along your paths by adding spot lighting and bollards. These machined aluminum products enhance the architectural elements of your home by using techniques like grazing and uplighting. Whether you choose to accentuate an object of interest or extend your living space, this collection has the sleek and slim profile to blend seamlessly into your pathways.

FINISHES OPTIONS:

Satin Aluminium (SA)
 Bronze (BZ)



MATERIAL:

Aluminum


RATINGS:

ETL cETL IP65
 Wet Location
 Title 24 (For Outdoor)



ADDITIONAL:

RATED LIFE: 35,000 Hours
 OPERATING TEMP: -20° C (-4°), 40° C (104° F)
 PHOTOMETRIC: Report Found Online
 PCB LED Integrated

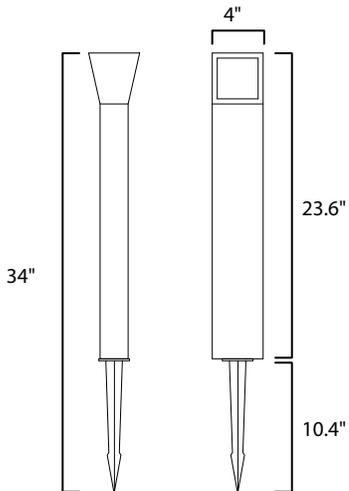

MEASUREMENT

DIMENSIONS : 4"W x 34"H
 WIRE LENGTH : 36"
 HANGING WEIGHT : 3.10 Lb

LAMPING

INPUT VOLTAGE : 12V
 LUMENS : 420 Rated (298 Del)
 BULB : (18) 5.4W LED (Integrated)
 DIMMABLE : No
 CRI : 80+
 COLOR TEMPERATURE: 3000K

Always consult a qualified electrician before installing any lighting product



WESTERN DISTRIBUTION CENTER (HEADQUARTERS)
 253 NORTH VINELAND AVE | CITY OF INDUSTRY, CA 91746

EASTERN DISTRIBUTION CENTER
 4200 SHIRLEY DR. | ATLANTA, GA 30336

P. 626.956.4200 | F. 626.956.4225 | et2online.com