Contemporary Lighting

Assembly Instruction ForE22898-89PC

Diagram A

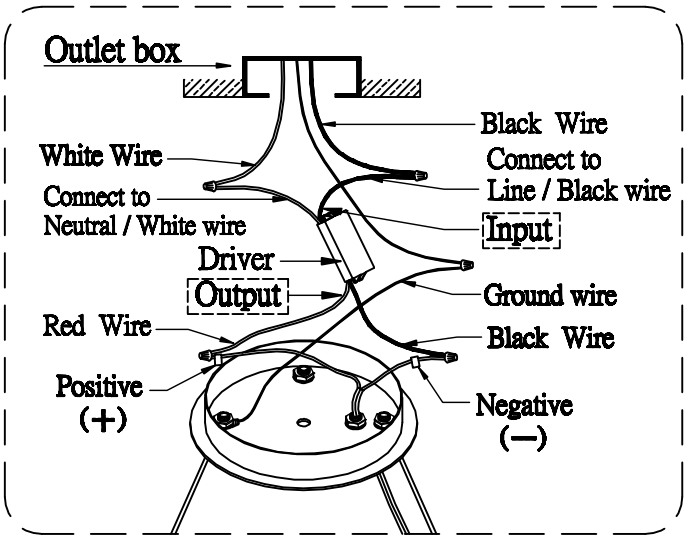

Turn off power at breaker for outlet fixtures is being installed to.

1. Install Crossbar Assembly to outlet box using Machine screw
2. Adjust length of the Cables to your desire height of fixture
3. Wire fixture assembly per Diagram A
4. Install fixture assembly to Crossbar assembly and secure with Hex Nut, and finials per Diagram B
5. Install bubble glass into glass holder

WARNING: These wires need to be connected to driver found in the canopy. Do not connect directly to power source or a Blowout/Shortcircuit might occur.
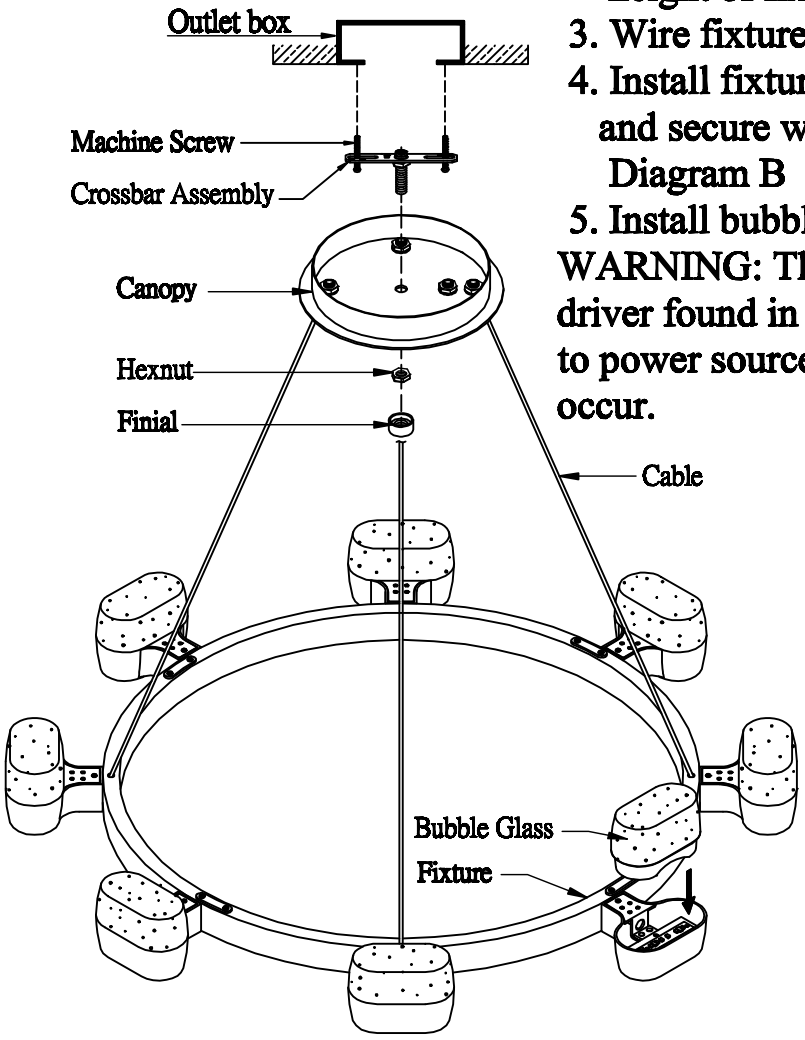
Diagram B