


PRODUCT NAME : Billow LED Bath Vanity  
ITEM NUMBER: E24124-MW

Please consult your electrician for hanging fixture and wiring.

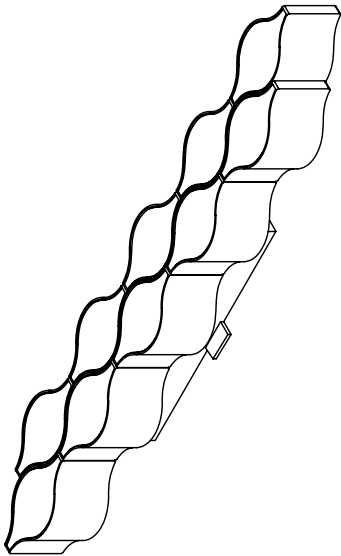

**WARNING: WIRES NEED TO BE CONNECTED TO DRIVER FOR MD IN CANOPY AND SHOULD NOT CONNECT DIRECTLY TO POWER SOURCE OR A SHORT MIGHT OCCUR.**

The fixture is designed to dim with a standard Tricac forward phase dimmer. Dimming levels will vary by dimmer.  
Below is a list of recommended dimmers:

- Lutron MACL-153M
- Lutron DVL-153P
- Lutron SCL-153P
- Leviton IPL06-10Z
- Leviton 6674-POW


**Due to the inrush current wattage should not exceed 150 watts of product for a 600 watt dimmer.**

55W LED


PRODUCTS ARE NOT INENDED FOR COMMERCIAL USE.

MADE IN CHINA  
Page 1 of (2)


IMPORTANT: Turn off the power at the main fuse or circuit breaker box before starting installation

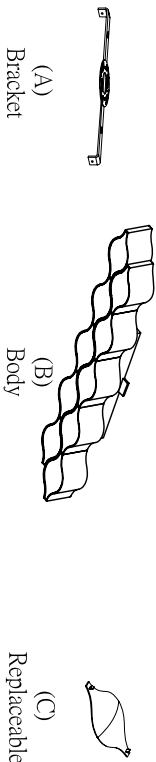


Locate all hardware & components before discarding packaging

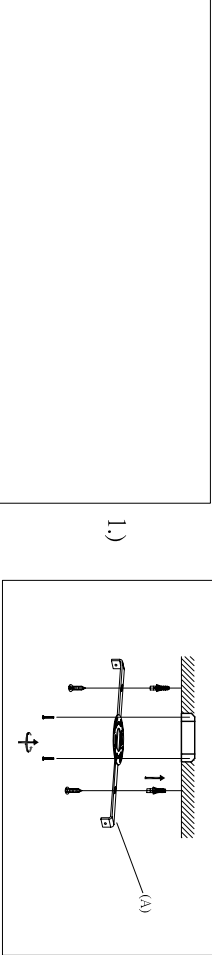

Step 1: Remove Bracket (A) from fixture and install to electrical box.

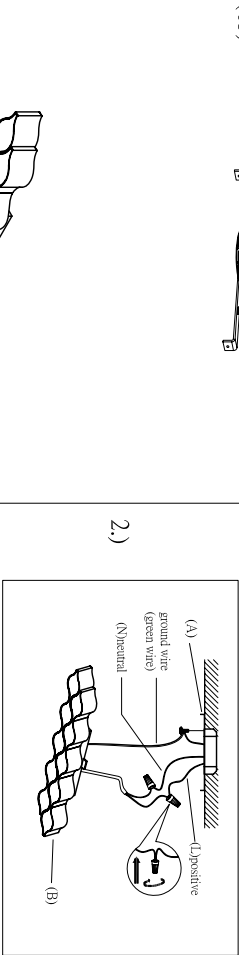

Step 2: Wire fixture to wires in outlet box. Install Green wire to Ground Screw.

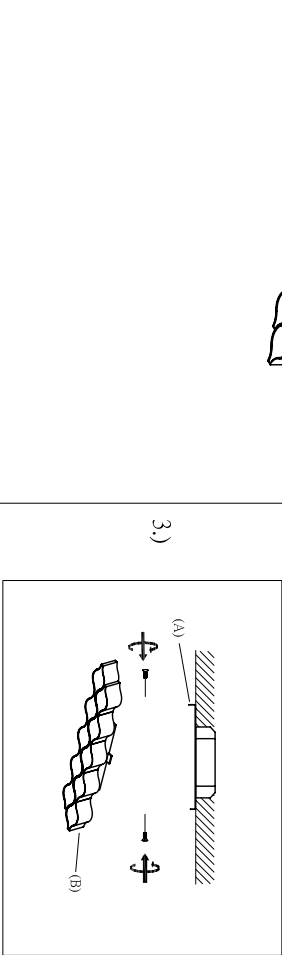

Step 3: Adjust wire length to desired hanging height. Install Body (B) to Bracket (A) and tighten screws at the ends of canopy to secure.

**Cleaning & Care:**  
Clean with soft cloth and a mild detergent. Do not use abrasive cleaner.