

Turn off power at breaker for outlet fixture is being installed to.

1. Wire Jack Canopy per Diagram B
2. Attach Backplate (A) to the Outlet Box and secure with Screw (B)
3. Install Jack Canopy (C) to Backplate (A) with Screw (D)
4. Attach Cap (F) to the Socket (E), then insert the Jack to the Socket (E). (Jack is not provided).
5. Install Jack Fixture follow instruction provided with Jack Fixture.

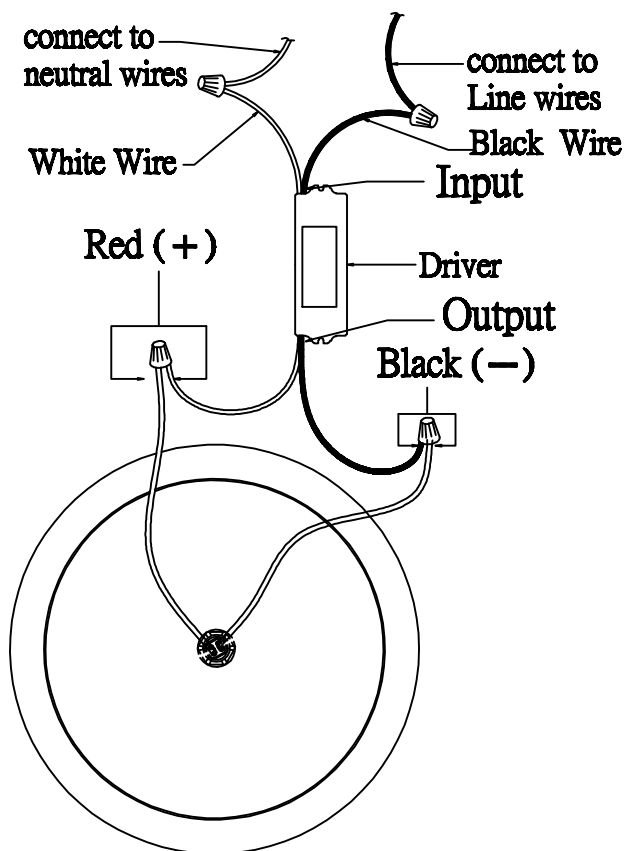


Diagram A

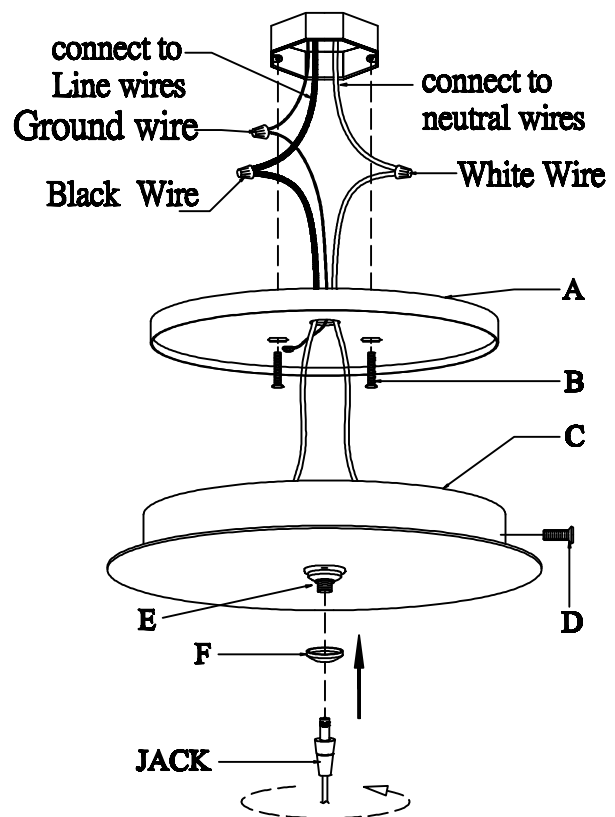


Diagram B