


ALUMILUX™ PATH LED I PATHWAY

E41365

- ETL, cETL IP65
- LED 3000K, CRI 90+
- Wet Location
- Use with a Low-Voltage Landscape Transformer (Not Included)

Job Name : _____
Job Type : _____
Quantity : _____
Comments : _____

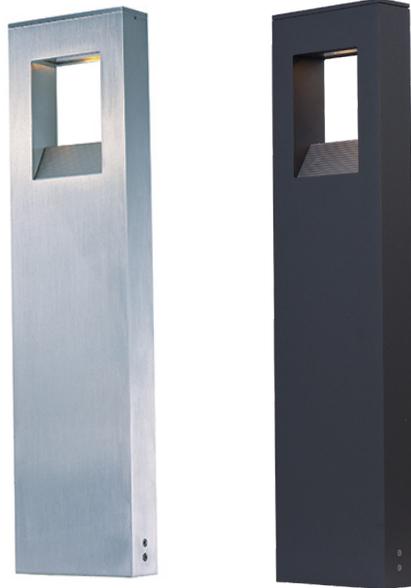

PRODUCT DESCRIPTION

Provide safe and functional lighting along your paths by adding spot lighting and bollards. These machined aluminum products enhance the architectural elements of your home by using techniques like grazing and uplighting. Whether you choose to accentuate an object of interest or extend your living space, this collection has the sleek and slim profile to blend seamlessly into your pathways.

FINISHES OPTIONS:

Satin Aluminium (SA)
Bronze (BZ)



MATERIAL:

Aluminium


RATINGS:

ETL cETL IP65
Wet Location
Title 24 (For Outdoor)



ADDITIONAL:

RATED LIFE: 35,000 Hours
OPERATING TEMP: -20° C (-4°), 40° C (104° F)
PHOTOMETRIC: Report Found Online
PCB LED Integrated

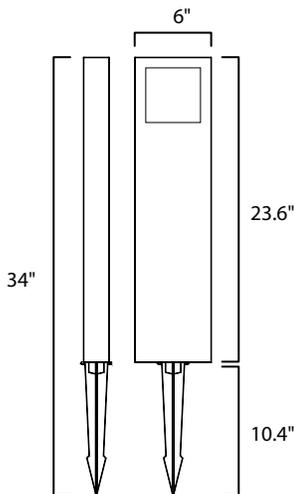

MEASUREMENT

DIMENSIONS : 6"W x 34"H
WIRE LENGTH : 36"
HANGING WEIGHT : 4 Lb

LAMPING

INPUT VOLTAGE : 12V
LUMENS : 420 Rated (216 Del)
BULB : (1) 6W PCB LED (Integrated)
DIMMABLE : No
CRI : 80+
COLOR TEMPERATURE: 3000K

Always consult a qualified electrician before installing any lighting product



WESTERN DISTRIBUTION CENTER (HEADQUARTERS)
253 NORTH VINELAND AVE | CITY OF INDUSTRY, CA 91746

EASTERN DISTRIBUTION CENTER
4200 SHIRLEY DR. | ATLANTA, GA 30336

P. 626.956.4200 | F. 626.956.4225 | et2online.com