
12
4

Contemporary Lighting™

RapidJack Installation Instructions

Jack on Cable Installation

- 1. Measure desired hanging height if fixture.
- Loosen top and bottom screws with allen wrench supplied so that cable moves freely through jack.
- 3. Move jack down cable below the point where cable will be cut.
- Cut cable and strip 1" of the metal braid from end exposing plastic covered wire.
- 5. Strip 1/4" of plastic cover from wire and twist strands together.
- Carefully pull cable back through the jack until the ends of the stranded wire are even with the top of the jack.
- Tighten top allen screw securely so to have good contact with the wire.
- Tighten lower allen screw until you feel screw make contact with inner wire bushing and then tighten an additional 3 full turns of the allen wrench.
- Test the security of the installation by holding the jack and gently pulling on the cable. The cable should not move. If there is some movement, tighten the screw ½ turn more.

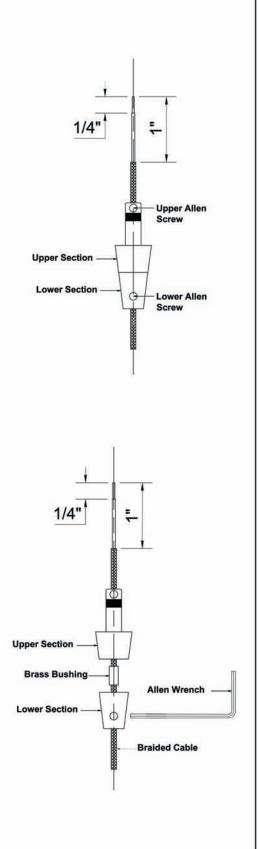

To Shorten Cable

- 1. Loosen the lower allen screw.
- Unscrew the lower portion of the jack by turning clockwise and drop down cable.
- 3. Cut the cable just below the brass bushing on the cable.
- 4. Loosen the top allen screw and pull out the cut end of the wire out of the top section from below.
- Insert the extra brass bushing onto the cable and slide down the cable 2"
- Insert the end of the cable into the bottom of the upper portion of the jack. With a twisting motion push cable into upper portion until it is through the top of the jack.
- 7. Screw lower portion of jack onto upper portion.
- 8. Follow steps 3 9 above.