




Installation Instructions Model E20704-20PC

1. Turn breaker off for circuit on outlet where fixture is to be installed.
2. Remove mounting bracket from fixture and install to electrical box
3. Mark holes for hollow wall anchors
4. Remove bracket from outlet box
5. Drill holes and install hollow wall anchors.
6. Reinstall mounting bracket to outlet box and secure ends of bracket to ceiling using anchor screws supplied.
7. Measure distance from ceiling that fixture is to hang. Crystal hangs approximately 28" below metal frame.
8. Adjust support cables accordingly by pushing spring loaded pin and pushing cable through. When pin is release it will lock onto cable. Extra cable can be cut but leave at least 10" extra. Reattach safety stops to end of cable.
9. Wire fixture to wires in outlet box. Green wire is for Ground.
10. Install fixture to bracket and tighten 2 nuts so that fixture meets the ceiling.
11. Level fixture by adjusting 4 cables. Attach power wire to cable using plastic clips supplied.
12. Install crystal strings frame per diagram

For maximum dimming performance we recommend Lutron:MACL-153M DVELV-300P
Leviton:IPL-06 dimmers.

Drop off or blinking may occur at the low end of dimming cycle. If this occurs
adjust trim tab on CL dimmer until drop off/blinking subsides.


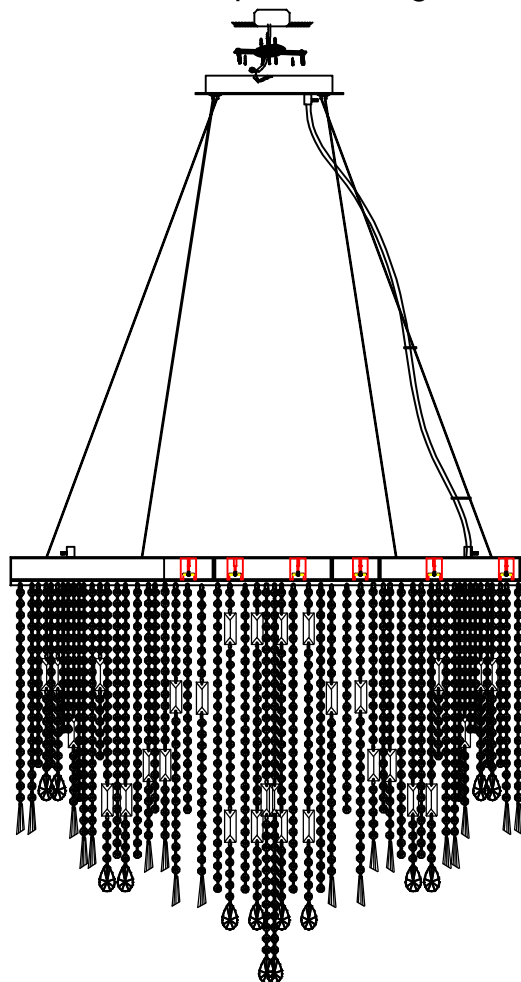




Contemporary
Lighting™

Installation Instructions

Model E20704-20PC

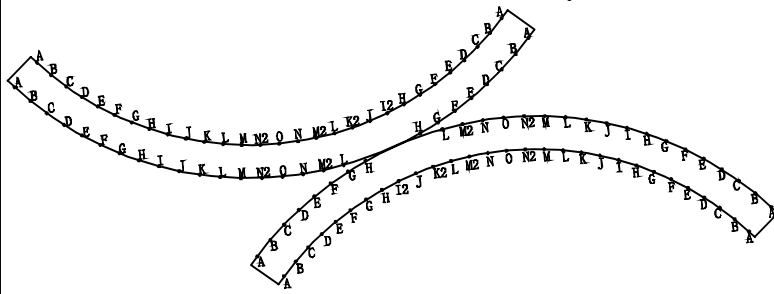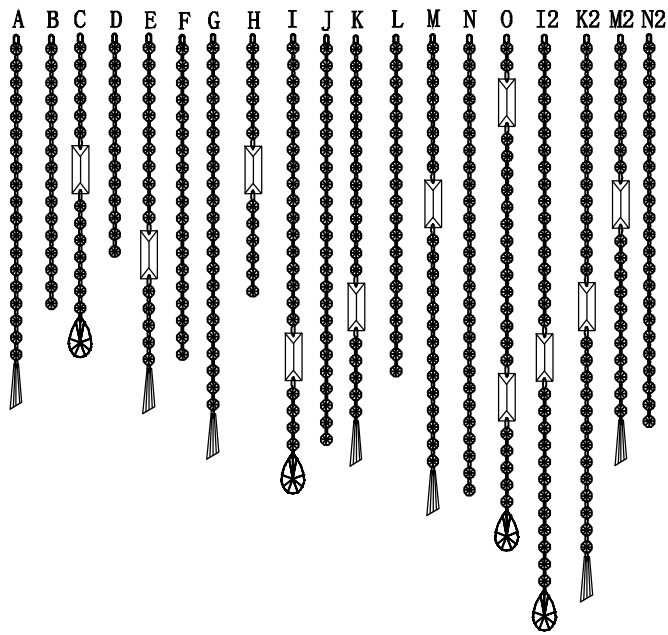

Code	CRY #	Qty	Length(inch)
A	ECRS20700-20A	8	19.1
B	ECRS20700-20B	8	13.6
C	ECRS20700-20C	8	15.9
D	ECRS20700-20D	8	11.22
E	ECRS20700-20E	8	18.5
F	ECRS20700-20F	8	16.14
G	ECRS20700-20G	8	21.5
H	ECRS20703-20A	8	13.0
I	ECRS20703-20B	4	22.1
J	ECRS20703-20C	6	18.11
K	ECRS20703-20D	4	20.3
L	ECRS20704-20A	8	16.5
M	ECRS20704-20B	4	23.6
N	ECRS20704-20C	4	22.44
O	ECRS20704-20D	4	24.8
I2	ECRS20704-20E	2	28.7
K2	ECRS20704-20F	2	27.6
M2	ECRS20704-20G	4	21.1
N2	ECRS20704-20H	4	18.9